

VINCI L PRO



"The all new Vinci LED Spotlights is designed for professional retail lighting. The characteristic and unique design of the heat sink is created for modern needs and preferences for a flexible solution. Vinci is available in black and white finish and with a set of accessories. Developed and produced in Sweden".

LED-spotlight with passive cooling system.
Die cast aluminium body, powder coat painted.
Integral electronic driver. Integral heatsink.
Rotation 365°. Vertical adjustment +/- 90°.
Track mounted with 3-circuit adaptor.



Class of protection	IP20, class I
Colours	White, black
Weight total	2700g
Reflector	High purity aluminium
Lifetime	50.000h L80/B10 at Ta 25°C
Mounting	3-circuit universal adaptor
Voltage	220-240V 50-60Hz
Ripple out. current	< 4%. Flicker-free performance
Qty per MCB	Max 34pcs/MCB 16A type B
Colour consistency	3 SDCM
Photobiological safety	RG1
Design	Jesper Ståhl
Dimming	Not dimmable

- White
- Black

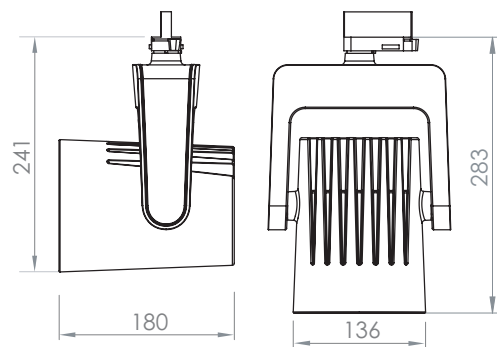

Accessories

Protective glass	204090
Honeycomb louvre	204091
Barndoors black	204092

VINCI L PRO

Description	Reflector	CCT (K)	CRI	Load	Lumen	Load	Lumen	Lm/W	○ White	● Black																																																																																																																																				
LIGHTSOURCE						LUMINAIRE			ART. No.																																																																																																																																					
WARM WHITE 3000K (830)																																																																																																																																														
Vinci L Pro 4000lm SP 830	Spot 14°	3000K	82	30W	4310	35W	3810	108	2040100	2040103																																																																																																																																				
Vinci L Pro 4000lm ME 830	Medium 26°	3000K	82	30W	4310	35W	3810	108	2040101	2040104																																																																																																																																				
Vinci L Pro 4000lm FL 830	Flood 40°	3000K	82	30W	4310	35W	3810	108	2040102	2040105																																																																																																																																				
Vinci L Pro 5000lm SP 830	Spot 14°	3000K	82	42W	5480	48W	4880	102	2040150	2040153																																																																																																																																				
Vinci L Pro 5000lm ME 830	Medium 26°	3000K	82	42W	5480	48W	4880	102	2040151	2040154																																																																																																																																				
Vinci L Pro 5000lm FL 830	Flood 40°	3000K	82	42W	5480	48W	4880	102	2040152	2040155																																																																																																																																				
<table border="1"> <thead> <tr> <th colspan="2">Spot</th> <th colspan="2">4000lm</th> <th colspan="2">5000lm</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,24</td> <td>23285</td> <td>29645</td> <td>1</td> <td>0,42</td> <td>13770</td> <td>17499</td> </tr> <tr> <td>2</td> <td>0,43</td> <td>5821</td> <td>7411</td> <td>2</td> <td>0,84</td> <td>3443</td> <td>4375</td> </tr> <tr> <td>3</td> <td>0,70</td> <td>2587</td> <td>3294</td> <td>3</td> <td>1,25</td> <td>1530</td> <td>1944</td> </tr> <tr> <td>4</td> <td>1,00</td> <td>1455</td> <td>1853</td> <td>4</td> <td>1,70</td> <td>861</td> <td>1094</td> </tr> </tbody> </table>						Spot		4000lm		5000lm		m	∅	Lux	Lux	m	∅	Lux	Lux	1	0,24	23285	29645	1	0,42	13770	17499	2	0,43	5821	7411	2	0,84	3443	4375	3	0,70	2587	3294	3	1,25	1530	1944	4	1,00	1455	1853	4	1,70	861	1094	<table border="1"> <thead> <tr> <th colspan="2">Medium</th> <th colspan="2">4000lm</th> <th colspan="2">5000lm</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,42</td> <td>13770</td> <td>17499</td> <td>1</td> <td>0,74</td> <td>6868</td> <td>8740</td> </tr> <tr> <td>2</td> <td>0,84</td> <td>3443</td> <td>4375</td> <td>2</td> <td>1,42</td> <td>1717</td> <td>2185</td> </tr> <tr> <td>3</td> <td>1,25</td> <td>1530</td> <td>1944</td> <td>3</td> <td>2,18</td> <td>763</td> <td>971</td> </tr> <tr> <td>4</td> <td>1,70</td> <td>861</td> <td>1094</td> <td>4</td> <td>2,91</td> <td>429</td> <td>546</td> </tr> </tbody> </table>			Medium		4000lm		5000lm		m	∅	Lux	Lux	m	∅	Lux	Lux	1	0,42	13770	17499	1	0,74	6868	8740	2	0,84	3443	4375	2	1,42	1717	2185	3	1,25	1530	1944	3	2,18	763	971	4	1,70	861	1094	4	2,91	429	546	<table border="1"> <thead> <tr> <th colspan="2">Flood</th> <th colspan="2">4000lm</th> <th colspan="2">5000lm</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,74</td> <td>6868</td> <td>8740</td> <td>1</td> <td>1,42</td> <td>1717</td> <td>2185</td> </tr> <tr> <td>2</td> <td>1,42</td> <td>1717</td> <td>2185</td> <td>2</td> <td>2,18</td> <td>763</td> <td>971</td> </tr> <tr> <td>3</td> <td>2,18</td> <td>763</td> <td>971</td> <td>3</td> <td>2,91</td> <td>429</td> <td>546</td> </tr> </tbody> </table>		Flood		4000lm		5000lm		m	∅	Lux	Lux	m	∅	Lux	Lux	1	0,74	6868	8740	1	1,42	1717	2185	2	1,42	1717	2185	2	2,18	763	971	3	2,18	763	971	3	2,91	429	546	<p>3000K 830 Spectral power distributions</p>	
Spot		4000lm		5000lm																																																																																																																																										
m	∅	Lux	Lux	m	∅	Lux	Lux																																																																																																																																							
1	0,24	23285	29645	1	0,42	13770	17499																																																																																																																																							
2	0,43	5821	7411	2	0,84	3443	4375																																																																																																																																							
3	0,70	2587	3294	3	1,25	1530	1944																																																																																																																																							
4	1,00	1455	1853	4	1,70	861	1094																																																																																																																																							
Medium		4000lm		5000lm																																																																																																																																										
m	∅	Lux	Lux	m	∅	Lux	Lux																																																																																																																																							
1	0,42	13770	17499	1	0,74	6868	8740																																																																																																																																							
2	0,84	3443	4375	2	1,42	1717	2185																																																																																																																																							
3	1,25	1530	1944	3	2,18	763	971																																																																																																																																							
4	1,70	861	1094	4	2,91	429	546																																																																																																																																							
Flood		4000lm		5000lm																																																																																																																																										
m	∅	Lux	Lux	m	∅	Lux	Lux																																																																																																																																							
1	0,74	6868	8740	1	1,42	1717	2185																																																																																																																																							
2	1,42	1717	2185	2	2,18	763	971																																																																																																																																							
3	2,18	763	971	3	2,91	429	546																																																																																																																																							
WARM WHITE 3000K (930)																																																																																																																																														
Vinci L Pro 4000lm SP 930	Spot 14°	3000K	92	42W	4675	48W	4160	88	2040112	2040115																																																																																																																																				
Vinci L Pro 4000lm ME 930	Medium 26°	3000K	92	42W	4675	48W	4160	88	2040113	2040116																																																																																																																																				
Vinci L Pro 4000lm FL 930	Flood 40°	3000K	92	42W	4675	48W	4160	88	2040114	2040117																																																																																																																																				
<table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,24</td> <td>25277</td> <td>1</td> <td>0,42</td> <td>14918</td> <td>1</td> <td>0,74</td> <td>7452</td> </tr> <tr> <td>2</td> <td>0,43</td> <td>6319</td> <td>2</td> <td>0,84</td> <td>3730</td> <td>2</td> <td>1,42</td> <td>1863</td> </tr> <tr> <td>3</td> <td>0,70</td> <td>2809</td> <td>3</td> <td>1,25</td> <td>1658</td> <td>3</td> <td>2,18</td> <td>828</td> </tr> <tr> <td>4</td> <td>1,00</td> <td>1580</td> <td>4</td> <td>1,70</td> <td>932</td> <td>4</td> <td>2,91</td> <td>466</td> </tr> </tbody> </table>						Spot 14°			Medium 26°			Flood 40°			m	∅	Lux	m	∅	Lux	m	∅	Lux	1	0,24	25277	1	0,42	14918	1	0,74	7452	2	0,43	6319	2	0,84	3730	2	1,42	1863	3	0,70	2809	3	1,25	1658	3	2,18	828	4	1,00	1580	4	1,70	932	4	2,91	466	<p>3000K 930 Spectral power distributions</p>																																																																																		
Spot 14°			Medium 26°			Flood 40°																																																																																																																																								
m	∅	Lux	m	∅	Lux	m	∅	Lux																																																																																																																																						
1	0,24	25277	1	0,42	14918	1	0,74	7452																																																																																																																																						
2	0,43	6319	2	0,84	3730	2	1,42	1863																																																																																																																																						
3	0,70	2809	3	1,25	1658	3	2,18	828																																																																																																																																						
4	1,00	1580	4	1,70	932	4	2,91	466																																																																																																																																						
NEUTRAL WHITE 4000K (840)																																																																																																																																														
Vinci L Pro 4000lm SP 840	Spot 14°	4000K	82	30W	4540	35W	4045	116	2040106	2040109																																																																																																																																				
Vinci L Pro 4000lm ME 840	Medium 26°	4000K	82	30W	4540	35W	4045	116	2040107	2040110																																																																																																																																				
Vinci L Pro 4000lm FL 840	Flood 40°	4000K	82	30W	4540	35W	4045	116	2040108	2040111																																																																																																																																				
Vinci L Pro 5000lm SP 840	Spot 14°	4000K	82	42W	5780	48W	5150	107	2040156	2040159																																																																																																																																				
Vinci L Pro 5000lm ME 840	Medium 26°	4000K	82	42W	5780	48W	5150	107	2040157	2040160																																																																																																																																				
Vinci L Pro 5000lm FL 840	Flood 40°	4000K	82	42W	5780	48W	5150	107	2040158	2040161																																																																																																																																				
<table border="1"> <thead> <tr> <th colspan="2">Spot</th> <th colspan="2">4000lm</th> <th colspan="2">5000lm</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,24</td> <td>24560</td> <td>31627</td> <td>1</td> <td>0,42</td> <td>14918</td> <td>18457</td> </tr> <tr> <td>2</td> <td>0,43</td> <td>6140</td> <td>7907</td> <td>2</td> <td>0,84</td> <td>3730</td> <td>4614</td> </tr> <tr> <td>3</td> <td>0,70</td> <td>2779</td> <td>3514</td> <td>3</td> <td>1,25</td> <td>1658</td> <td>2051</td> </tr> <tr> <td>4</td> <td>1,00</td> <td>1535</td> <td>1977</td> <td>4</td> <td>1,70</td> <td>932</td> <td>1154</td> </tr> </tbody> </table>						Spot		4000lm		5000lm		m	∅	Lux	Lux	m	∅	Lux	Lux	1	0,24	24560	31627	1	0,42	14918	18457	2	0,43	6140	7907	2	0,84	3730	4614	3	0,70	2779	3514	3	1,25	1658	2051	4	1,00	1535	1977	4	1,70	932	1154	<table border="1"> <thead> <tr> <th colspan="2">Medium</th> <th colspan="2">4000lm</th> <th colspan="2">5000lm</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,42</td> <td>14918</td> <td>18457</td> <td>1</td> <td>0,74</td> <td>7241</td> <td>9272</td> </tr> <tr> <td>2</td> <td>0,84</td> <td>3730</td> <td>4614</td> <td>2</td> <td>1,42</td> <td>1810</td> <td>2318</td> </tr> <tr> <td>3</td> <td>1,25</td> <td>1658</td> <td>2051</td> <td>3</td> <td>2,18</td> <td>805</td> <td>1030</td> </tr> <tr> <td>4</td> <td>1,70</td> <td>932</td> <td>1154</td> <td>4</td> <td>2,91</td> <td>453</td> <td>580</td> </tr> </tbody> </table>		Medium		4000lm		5000lm		m	∅	Lux	Lux	m	∅	Lux	Lux	1	0,42	14918	18457	1	0,74	7241	9272	2	0,84	3730	4614	2	1,42	1810	2318	3	1,25	1658	2051	3	2,18	805	1030	4	1,70	932	1154	4	2,91	453	580	<p>4000K 840 Spectral power distributions</p>																																										
Spot		4000lm		5000lm																																																																																																																																										
m	∅	Lux	Lux	m	∅	Lux	Lux																																																																																																																																							
1	0,24	24560	31627	1	0,42	14918	18457																																																																																																																																							
2	0,43	6140	7907	2	0,84	3730	4614																																																																																																																																							
3	0,70	2779	3514	3	1,25	1658	2051																																																																																																																																							
4	1,00	1535	1977	4	1,70	932	1154																																																																																																																																							
Medium		4000lm		5000lm																																																																																																																																										
m	∅	Lux	Lux	m	∅	Lux	Lux																																																																																																																																							
1	0,42	14918	18457	1	0,74	7241	9272																																																																																																																																							
2	0,84	3730	4614	2	1,42	1810	2318																																																																																																																																							
3	1,25	1658	2051	3	2,18	805	1030																																																																																																																																							
4	1,70	932	1154	4	2,91	453	580																																																																																																																																							
NEUTRAL WHITE 4000K (940)																																																																																																																																														
Vinci L Pro 4000lm SP 940	Spot 14°	4000K	92	42W	5010	48W	4460	95	2040180	2040184																																																																																																																																				
Vinci L Pro 4000lm ME 940	Medium 26°	4000K	92	42W	5010	48W	4460	95	2040181	2040185																																																																																																																																				
Vinci L Pro 4000lm FL 940	Flood 40°	4000K	92	42W	5010	48W	4460	95	2040182	2040186																																																																																																																																				
<table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,24</td> <td>27081</td> <td>1</td> <td>0,42</td> <td>15986</td> <td>1</td> <td>0,74</td> <td>7984</td> </tr> <tr> <td>2</td> <td>0,43</td> <td>6770</td> <td>2</td> <td>0,84</td> <td>3997</td> <td>2</td> <td>1,42</td> <td>1996</td> </tr> <tr> <td>3</td> <td>0,70</td> <td>3009</td> <td>3</td> <td>1,25</td> <td>1776</td> <td>3</td> <td>2,18</td> <td>887</td> </tr> <tr> <td>4</td> <td>1,00</td> <td>1693</td> <td>4</td> <td>1,70</td> <td>999</td> <td>4</td> <td>2,91</td> <td>499</td> </tr> </tbody> </table>						Spot 14°			Medium 26°			Flood 40°			m	∅	Lux	m	∅	Lux	m	∅	Lux	1	0,24	27081	1	0,42	15986	1	0,74	7984	2	0,43	6770	2	0,84	3997	2	1,42	1996	3	0,70	3009	3	1,25	1776	3	2,18	887	4	1,00	1693	4	1,70	999	4	2,91	499	<p>4000K 940 Spectral power distributions</p>																																																																																		
Spot 14°			Medium 26°			Flood 40°																																																																																																																																								
m	∅	Lux	m	∅	Lux	m	∅	Lux																																																																																																																																						
1	0,24	27081	1	0,42	15986	1	0,74	7984																																																																																																																																						
2	0,43	6770	2	0,84	3997	2	1,42	1996																																																																																																																																						
3	0,70	3009	3	1,25	1776	3	2,18	887																																																																																																																																						
4	1,00	1693	4	1,70	999	4	2,91	499																																																																																																																																						

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of color temperature: +/-150 K. Values apply to an ambient temperature of 25°C.