


VINCI L PRO

"The all new Vinci LED Spotlights is designed for professional retail lighting. The characteristic and unique design of the heat sink is created for modern needs and preferences for a flexible solution. Vinci is available in black and white finish and with and a set of accessories. Developed and produced in Sweden".


LED-spotlight with passive cooling system.
Die cast aluminium body, powder coat painted.
Integral electronic driver. Integral heatsink.
Rotation 365°. Vertical adjustment +/- 90°.
Track mounted with 3-circuit adaptor.



| | |
|-------------------------------|--------------------------------|
| Class of protection | IP20, class I |
| Colours | White, black |
| Weight total | 2700g |
| Reflector | High purity aluminium |
| Lifetime | 50.000h L80/B10 at Ta 25°C |
| Mounting | 3-circuit universal adaptor |
| Voltage | 220-240V 50-60Hz |
| Ripple out. current | < 4%. Flicker-free performance |
| Qty per MCB | Max 34pcs/MCB 16A type B |
| Colour consistency | 3 SDCM |
| Photobiological safety | RG1 |
| Design | Jesper Ståhl |
| Dimming | Not dimmable |

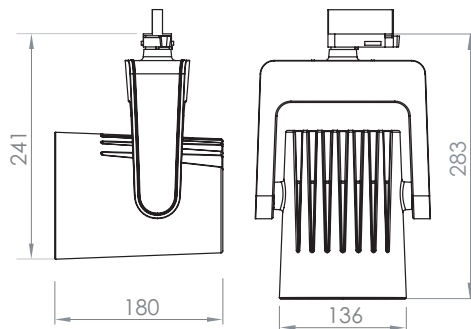

- White
- Black



Accessories

| | |
|------------------|--------|
| Protective glass | 204090 |
| Honeycomb louvre | 204091 |
| Barndoors black | 204092 |

VINCI L PRO

| Description | Reflector | CCT (K) | CRI | Load | Lumen | Load | Lumen | Lm/W | ○ White | ● Black | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------------|---------|------------|------|-------|-------------|-------|------|------------|---------|--|-----------|--|--|---|---|-----|---|---|-----|---|---|-----|---|------|-------|---|------|-------|---|------|------|---|------|-------|---|------|------|---|------|------|---|------|------|---|------|------|---|------|------|---|------|------|---|------|------|---|------|-----|--|--|--|--|--|
| | | | | | | LIGHTSOURCE | | | LUMINAIRE | | | ART. No. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WARM WHITE 3000K (930) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vinci L Pro 5000lm SP 930 | Spot 14° | 3000K | 92 | 42W | 5360 | 47W | 4715 | 100 | 2040210 | 2040214 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vinci L Pro 5000lm ME 930 | Medium 26° | 3000K | 92 | 42W | 5360 | 47W | 4715 | 100 | 2040211 | 2040215 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vinci L Pro 5000lm FL 930 | Flood 40° | 3000K | 92 | 42W | 5360 | 47W | 4715 | 100 | 2040212 | 2040216 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,26</td> <td>37222</td> <td>1</td> <td>0,46</td> <td>16467</td> <td>1</td> <td>0,67</td> <td>9135</td> </tr> <tr> <td>2</td> <td>0,51</td> <td>9306</td> <td>2</td> <td>0,92</td> <td>4117</td> <td>2</td> <td>1,35</td> <td>2284</td> </tr> <tr> <td>3</td> <td>0,77</td> <td>4136</td> <td>3</td> <td>1,39</td> <td>1830</td> <td>3</td> <td>2,02</td> <td>1015</td> </tr> <tr> <td>4</td> <td>1,02</td> <td>2326</td> <td>4</td> <td>1,86</td> <td>1029</td> <td>4</td> <td>2,70</td> <td>571</td> </tr> </tbody> </table> | | | | | | Spot 14° | | | Medium 26° | | | Flood 40° | | | m | ∅ | Lux | m | ∅ | Lux | m | ∅ | Lux | 1 | 0,26 | 37222 | 1 | 0,46 | 16467 | 1 | 0,67 | 9135 | 2 | 0,51 | 9306 | 2 | 0,92 | 4117 | 2 | 1,35 | 2284 | 3 | 0,77 | 4136 | 3 | 1,39 | 1830 | 3 | 2,02 | 1015 | 4 | 1,02 | 2326 | 4 | 1,86 | 1029 | 4 | 2,70 | 571 | <p>3000K 930 Spectral power distributions</p> | | | | |
| Spot 14° | | | Medium 26° | | | Flood 40° | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| m | ∅ | Lux | m | ∅ | Lux | m | ∅ | Lux | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0,26 | 37222 | 1 | 0,46 | 16467 | 1 | 0,67 | 9135 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 0,51 | 9306 | 2 | 0,92 | 4117 | 2 | 1,35 | 2284 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 0,77 | 4136 | 3 | 1,39 | 1830 | 3 | 2,02 | 1015 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 1,02 | 2326 | 4 | 1,86 | 1029 | 4 | 2,70 | 571 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NEUTRAL WHITE 4000K (940) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vinci L Pro 5000lm SP 940 | Spot 14° | 4000K | 92 | 42W | 5780 | 47W | 5080 | 107 | 2040250 | 2040254 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vinci L Pro 5000lm ME 940 | Medium 26° | 4000K | 92 | 42W | 5780 | 47W | 5080 | 107 | 2040251 | 2040255 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vinci L Pro 5000lm FL 940 | Flood 40° | 4000K | 92 | 42W | 5780 | 47W | 5080 | 107 | 2040252 | 2040256 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th colspan="3">Spot 14°</th> <th colspan="3">Medium 26°</th> <th colspan="3">Flood 40°</th> </tr> <tr> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> <th>m</th> <th>∅</th> <th>Lux</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0,26</td> <td>40128</td> <td>1</td> <td>0,46</td> <td>17745</td> <td>1</td> <td>0,67</td> <td>9851</td> </tr> <tr> <td>2</td> <td>0,51</td> <td>10032</td> <td>2</td> <td>0,92</td> <td>4436</td> <td>2</td> <td>1,35</td> <td>2463</td> </tr> <tr> <td>3</td> <td>0,77</td> <td>4459</td> <td>3</td> <td>1,39</td> <td>1972</td> <td>3</td> <td>2,02</td> <td>1095</td> </tr> <tr> <td>4</td> <td>1,02</td> <td>2508</td> <td>4</td> <td>1,86</td> <td>1109</td> <td>4</td> <td>2,70</td> <td>616</td> </tr> </tbody> </table> | | | | | | Spot 14° | | | Medium 26° | | | Flood 40° | | | m | ∅ | Lux | m | ∅ | Lux | m | ∅ | Lux | 1 | 0,26 | 40128 | 1 | 0,46 | 17745 | 1 | 0,67 | 9851 | 2 | 0,51 | 10032 | 2 | 0,92 | 4436 | 2 | 1,35 | 2463 | 3 | 0,77 | 4459 | 3 | 1,39 | 1972 | 3 | 2,02 | 1095 | 4 | 1,02 | 2508 | 4 | 1,86 | 1109 | 4 | 2,70 | 616 | <p>4000K 940 Spectral power distributions</p> | | | | |
| Spot 14° | | | Medium 26° | | | Flood 40° | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| m | ∅ | Lux | m | ∅ | Lux | m | ∅ | Lux | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0,26 | 40128 | 1 | 0,46 | 17745 | 1 | 0,67 | 9851 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 0,51 | 10032 | 2 | 0,92 | 4436 | 2 | 1,35 | 2463 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 0,77 | 4459 | 3 | 1,39 | 1972 | 3 | 2,02 | 1095 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 1,02 | 2508 | 4 | 1,86 | 1109 | 4 | 2,70 | 616 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%.
Tolerance of color temperature: +/-150 K. Values apply to an ambient temperature of 25°C.